


XIt1070

3U VPX Rear Transition Module with Gigabit Ethernet, SATA, USB, Serial, and DVI

- ▶ 3U VPX Rear Transition Module (VITA 46.10)
- ▶ Support for X-ES's 3U VPX SBC module I/O
- ▶ Two optional mini-HDMI connectors for dual DVI ports
- ▶ Up to two eSATA connectors for dual SATA ports
- ▶ One micro DB-9 connector for dual serial ports
- ▶ One USB connector
- ▶ Two RJ-45 connectors for dual 10/100/1000BASE-T ports
- ▶ 1 in. pitch

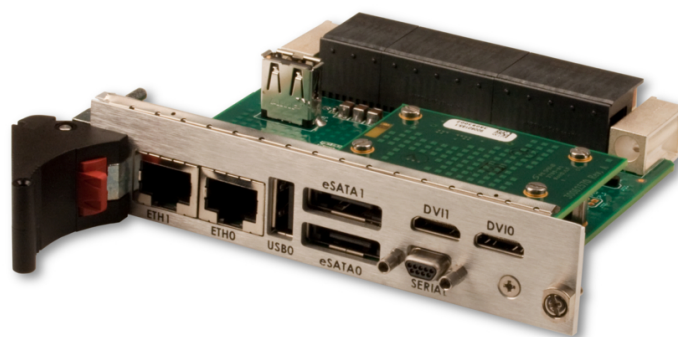

XIt1070

The XIt1070 provides I/O expansion for 3U VPX SBCs. The XIt1070 supports one RS-232/RS-422/RS-485 port, one RS-232 port, a SATA port, two 10/100/1000BASE-T ports, and a USB port in its default configuration. When mated with the optional XIt1071, an additional SATA port and two Mini-HDMI (DVI) ports are also provided.

X-ES

Extreme Engineering Solutions

...Always Fast

Extreme Engineering Solutions

3225 Deming Way, Suite 120 • Middleton, WI 53562

Phone: 608.833.1155 • Fax: 608.827.6171

sales@xes-inc.com • <http://www.xes-inc.com>

Back Panel I/O (Standard)

- Two RJ-45 connectors for dual 10/100/1000BASE-T ports
- One micro DB-9 for dual serial ports
- One USB connector
- One eSATA connector

Back Panel I/O (With Optional XIt1071)

- Additional eSATA connector
- Two Mini-HDMI connectors for dual DVI ports

Physical Characteristics

- 3U VPX RTM (VITA 46.10) form factor
- Dimensions: 100 mm x 85.5 mm
- 1" pitch

Environmental Requirements

Contact factory for appropriate board configuration based on environmental requirements.

- Supported ruggedization levels (see chart below): 1
- Conformal coating available as an ordering option

Supported Ruggedization Level	Level 1
Cooling Method	Standard Air-Cooled
Operating Temperature	0 to +55 °C ambient (300 LFM)
Storage Temperature	0 to +85 °C ambient
Vibration	0.002 g ² /Hz, 5 to 2000 Hz
Shock	20 g, 11 ms sawtooth
Humidity	0% to 95% non-condensing

