


XPort1003

Freescale MPC8270 Processor-Based Multi-Protocol Four-Port Serial Conduction-Cooled PMC Module

- ▶ Freescale MPC8270 PowerQUICC II processors at up to 300 MHz with integrated PCI
- ▶ Four SCCs supporting a broad range of serial protocols
- ▶ Conduction-cooled PMC
- ▶ Up to 64 MB of ECC SDRAM
- ▶ Up to 128 MB of soldered flash
- ▶ 2 kB SEEPROM
- ▶ Two RS-232 SMC ports (optional)
- ▶ Rear panel I/O
- ▶ Wind River VxWorks BSP
- ▶ Linux BSP
- ▶ Microsoft Windows NT/2000/XP Driver

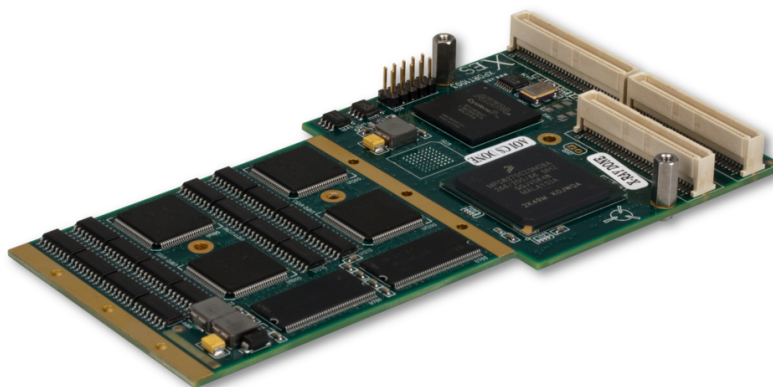

XPort1003

The XPort1003 is an intelligent communications controller targeting high-performance under extreme operating conditions. The XPort1003 combines a wide array of supported serial protocols, a broad range of serial interface standards, and a flexible I/O routing structure to pack maximum flexibility into an industry-standard, conduction-cooled PMC module.

Powered by the Freescale MPC8270 (PowerQUICC II), the XPort1003 implements four serial communication ports, each providing a reduced EIA-530-A-compatible signal set. It supports HDLC/SDLC, UART, transparent, and BiSync modes, with NRZ, NRZI, FM0, FM1, Manchester and Differential Manchester encoding. Coupled with software-configurable support for RS-232, RS-422, RS-423, RS-485 and MIL-STD-188-114, the XPort1003 provides a wide range of serial options.

The XPort1003 will minimize both the cost and power consumption of your system. Because the PCI bridge is integrated on-chip, the XPort1003 draws less power and costs less than conventional designs based on other processors that require a PCI bridge.

X-ES

Extreme Engineering Solutions

...Always Fast

Extreme Engineering Solutions

3225 Deming Way, Suite 120 • Middleton, WI 53562
 Phone: 608.833.1155 • Fax: 608.827.6171
 sales@xes-inc.com • <http://www.xes-inc.com>

Processor

- Freescale MPC8270 PowerQUICC II
- Embedded PowerPC G2 core
- Up to 300 Mhz
- 280 Dhrystones at 200 Mhz
- 66 MHz 60x bus
- 16 kB instruction and data caches
- 32 kB internal SRAM
- Integrated MMU
- Core disabled operation
- 32-bit/66-MHz PCI

Memory

- Up to 64 MB ECC SDRAM
- Up to 128 MB surface-mount flash (optional)
- 2 kB SEEPROM

Rear Panel I/O

- Four multi-protocol SCC ports
- Two RS-232 serial ports (optional)

Serial Communication Controller

- HDLC, UART, transparent, and BiSync modes
- DPLL supporting NRZ, NRZI, FM0, FM1, Manchester and Differential Manchester
- Independent BRGs for each SCC transmitter and receiver
- 18.432 MHz external oscillator (default)
- Custom frequency external oscillators (optional)

Serial Interface

- Drivers software-configurable for RS-232, RS-422, RS-423, RS-485, and MIL-STD-188-114 balanced/unbalanced type 1 and 2 modes
- 10 Mbps max synchronous
- 4 Mbps max asynchronous

Software

- SCC and SMC drivers
- Wind River VxWorks BSP
- Linux BSP
- Microsoft Windows NT/2000/XP driver

Physical Characteristics

- Conduction-cooled PMC form factor
- Dimensions: 143.75 mm x 74 mm

Environmental Requirements

Contact factory for appropriate board configuration based on environmental requirements.

- Supported ruggedization levels (see chart below): 5
- Conformal coating available as an ordering option

Ruggedization

- Conduction-cooled: VITA 47 Class V3 vibration, Class OS2 shock

Power Requirements

- +3.3V, 0.6 A, 1.98 W
- +5.0V, 0.35 A, 1.75 W

Supported Ruggedization Level	Level 5
Cooling Method	Conduction-Cooled
Operating Temperature	-40 to +85 °C (board rail surface)
Storage Temperature	-55 to +105 °C ambient
Vibration	0.1 g ² /Hz (maximum), 5 to 2000 Hz
Shock	40 g, 11 ms sawtooth
Humidity	0% to 95% non-condensing

