


XPort1011

Freescale MPC8270 Processor-Based Multi-Protocol Four-Port Serial PCI Module

- ▶ Freescale MPC8270 at up to 300 MHz with integrated PCI
- ▶ Four SCCs support RS-232 or RS-422/RS-485
- ▶ Software-configurable serial interface modes
- ▶ Front I/O
- ▶ Up to 256 MB SDRAM
- ▶ Up to 16 MB soldered flash
- ▶ 512 kB socketed flash
- ▶ 2 kB SEEPROM
- ▶ Two RS-232 SMC ports
- ▶ Linux BSP
- ▶ Wind River VxWorks BSP
- ▶ VxWorks, Linux, Windows, and OSE drivers

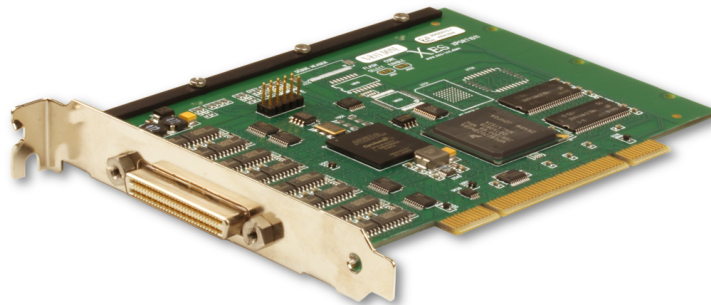

XPort1011

The XPort1011 is an intelligent communications controller targeting high-performance yet low-cost applications. The XPort1011 combines a wide array of supported serial protocols, a broad range of serial interface standards, and a flexible I/O routing structure, to pack maximum flexibility into an industry-standard PCI card.

Powered by the Freescale MPC8270 (PowerQUICC II™), the XPort1011 implements four serial communication ports providing an EIA-530-A-compliant signal set, supporting HDLC/SDLC, UART, transparent, and BiSync modes, with NRZ, NRZI, FM0, FM1, Manchester and Differential Manchester encoding. Coupled with software configurable support for RS-232, RS-422, RS-423, RS-485, and MIL-STD-188-114A (Type I and II, balanced or unbalanced), the XPort1011 provides maximum flexibility for your application.

For a system designer, the XPort1011 will help drive both cost and power consumption down. Because the PCI bridge is integrated on chip, the XPort1011 draws up to 40% less power, and costs up to 30% less than conventional designs based on other processors.

X-ES

Extreme Engineering Solutions

...Always Fast

Extreme Engineering Solutions

3225 Deming Way, Suite 120 • Middleton, WI 53562
 Phone: 608.833.1155 • Fax: 608.827.6171
 sales@xes-inc.com • <http://www.xes-inc.com>

Processor

- Freescale MPC8270 processor
- 300 MHz max processor speed
- 280 Dhrystones at 200 MHz
- 66 MHz 60x bus
- 16 kB L1 instruction/data caches
- 32 kB internal SRAM
- Integrated MMU
- Integrated floating point unit
- Core-disabled mode

Memory

- Up to 256 MB SDRAM
- 16 MB surface mount flash
- 2 kB SEEPROM

Serial Communication Controller

- HDLC, UART, transparent, and BiSync modes
- DPLL supporting NRZ, NRZI, FM0, FM1, Manchester, and Differential Manchester
- Independent BRGs for each SCC transceiver
- Two optional external custom oscillators

Serial Interface (Standard)

- Software-configurable drivers for RS-232, RS-422, RS-423, RS-485, and MIL-STD-188-114A Type I and II balanced/unbalanced modes
- 10 Mbps max synchronous
- 4 Mbps max asynchronous
- EIA-530-A DTE/DCE cable selectable

Software

- Linux BSP
- Wind River VxWorks BSP
- VxWorks, Linux, Windows, and OSE drivers

Physical Characteristics

- PCI form factor
- 5.875 in. (W), 4.2 in. (L)
- 3.8 oz.

Environmental Requirements

Contact factory for appropriate board configuration based on environmental requirements.

- Supported ruggedization levels (see chart below): 1
- Conformal coating available as an ordering option

Power Requirements (Estimate)

- 3.3V, 0.60 A, 1.98 W
- 5V, 0.35 A, 1.75 W
- +12V, 0.012 A, 0.15 W
- 012V, 0.012 A, 0.15 W

Supported Ruggedization Level

Level 1

Cooling Method	Standard Air-Cooled
Operating Temperature	0 to +55 °C ambient (300 LFM)
Storage Temperature	0 to +85 °C ambient
Vibration	0.002 g ² /Hz, 5 to 2000 Hz
Shock	20 g, 11 ms sawtooth
Humidity	0% to 95% non-condensing

