


XChange1002

End of Life

Dual PrPMC cPCI Carrier Card with PICMG 2.16 Switched Ethernet

Please see XChange1200

- ▶ 100 MHz PCI-X cPCI and local bus interfaces
- ▶ Hot Swap support
- ▶ Two PICMG 2.16 backplane Ethernet ports
- ▶ Complies to PICMG 2.0, 2.1, 2.3, 2.9, and 2.16
- ▶ IPMI satellite management controller
- ▶ Wind River VxWorks BSP
- ▶ Linux BSP

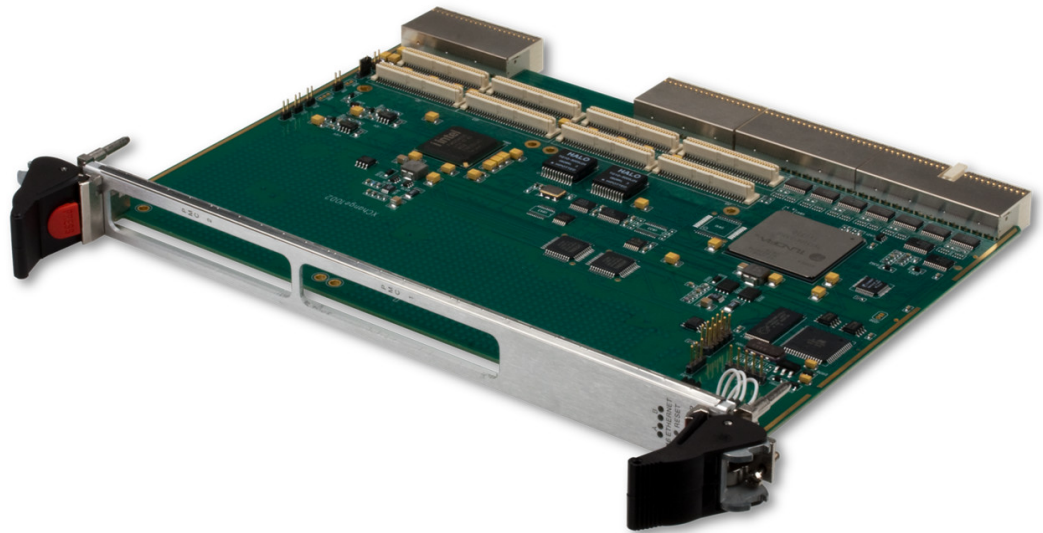

XChange1002

The XChange1002 is a versatile 6U CompactPCI dual PMC carrier card with a PICMG 2.16 Gigabit Ethernet backplane interface. The XChange1002 supports 100 MHz PCI-X on both the CompactPCI and local bus interfaces (the XChange1002 uses a transparent bridge, which allows it to operate as a peripheral carrier card in a CompactPCI environment).

PICMG 2.1 Hot Swap support allows the XChange1002 to be installed into a live system without disrupting CompactPCI bus activity. In addition, the system management bus support allows the card to be powered down and reset remotely through the PICMG 2.9 IPMI interface. The IPMI interface also allows for the monitoring of voltage and temperature levels on the cards attached to the two PrPMC slots.

X-ES

Extreme Engineering Solutions

...Always Fast

Extreme Engineering Solutions

3225 Deming Way, Suite 120 • Middleton, WI 53562

Phone: 608.833.1155 • Fax: 608.827.6171

sales@xes-inc.com • <http://www.xes-inc.com>

cPCI

- PICMG 2.1 (Hot Swap support)
- PICMG 2.3 (PMC I/O to J3 and J5)
- PICMG 2.9 (dedicated IPMI controller)
- PICMG 2.16 (two 10/100/1000BASE-T Ethernet ports)

PCI-X PMC Slots

- Maximum aggregate bandwidth of 1 Gb/s
- Processor PMC (PrPMC) support

Software Support

- Linux BSP
- Wind River VxWorks BSP
- IPMI drivers

Physical

- 6U cPCI form factor
- 233.35 mm x 160 mm

Environmental Requirements

Contact factory for appropriate board configuration based on environmental requirements.

- Supported ruggedization levels (see chart below): 1
- Conformal coating available as an ordering option

Power Requirements

- 3.3 V, 0.61 A, 2 W

Ruggedization Level	Level 1	Level 3	Level 5
Cooling Method	Standard Air-Cooled	Rugged Air-Cooled	Conduction-Cooled
Operating Temperature	0 to +55°C ambient (300 LFM)	-40 to +70°C (600 LFM)	-40 to +85°C (board rail surface)
Storage Temperature	-40 to +85°C ambient	-55 to +105°C ambient	-55 to +105°C ambient
Vibration	0.002 g ² /Hz, 5 to 2000 Hz	0.04 g ² /Hz (maximum), 5 to 2000 Hz	0.1 g ² /Hz (maximum), 5 to 2000 Hz
Shock	20 g, 11 ms sawtooth	30 g, 11 ms sawtooth	40 g, 11 ms sawtooth
Humidity	0% to 95% non-condensing	0% to 95% non-condensing	0% to 95% non-condensing

