


XCalibur4341

End of Life

Intel® Core™ i7 Processor-Based Conduction- or Air-Cooled 6U VPX Module

Please contact X-ES Sales

- ▶ Intel® Core™ i7-610E, -620LE, -620UE, and -660UE processors
- ▶ Dual-core with Hyper-Threading Technology
- ▶ 6U VPX module
- ▶ OpenVPX™ standards-based
- ▶ Conduction or air cooling
- ▶ Up to 8 GB DDR3-1066 ECC SDRAM in two channels
- ▶ 32 MB NOR boot flash
- ▶ Up to 128 GB of NAND flash
- ▶ Five Gigabit Ethernet ports
- ▶ x8 PCI Express Gen2 ports from switch to CPU and XMC sites
- ▶ Four x4 PCI Express Gen2 ports from switch to backplane
- ▶ Two DVI-D graphics ports
- ▶ Audio line I/O port
- ▶ Four SATA ports on backplane
- ▶ Three USB 2.0 ports (one to front panel and two to backplane)
- ▶ Two RS-232/422/485 serial ports
- ▶ Two XMC/PMC interfaces
- ▶ Linux BSP
- ▶ Wind River VxWorks BSP
- ▶ QNX Neutrino BSP
- ▶ Green Hills INTEGRITY BSP
- ▶ Microsoft Windows drivers

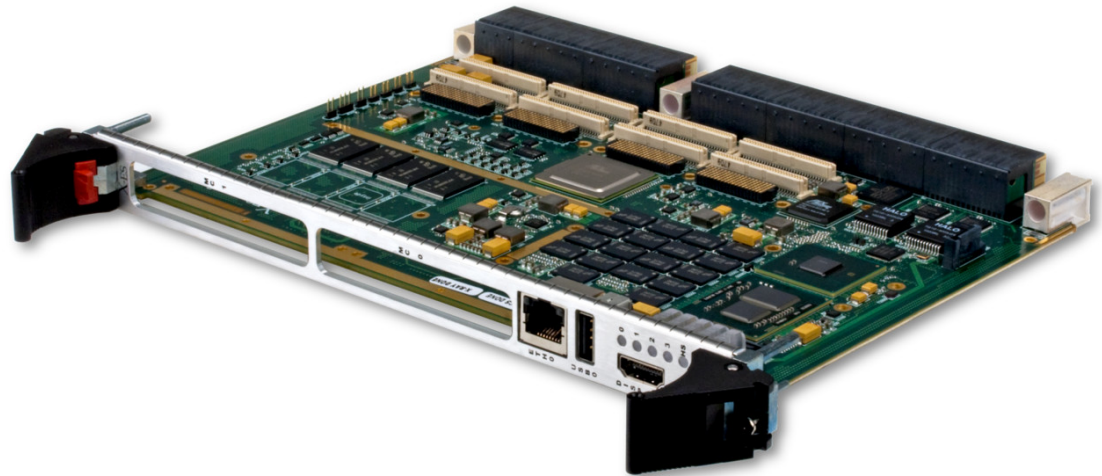

XCalibur4341

The XCalibur4341 is a high-performance, 6U VPX, multiprocessing, single board computer that is ideal for ruggedized systems requiring high bandwidth processing and low power consumption. With the Intel® Core™ i7 processor and Intel® QM57 chipset, the XCalibur4341 delivers enhanced performance and efficiency for today's network information processing and embedded computing applications.

The XCalibur4341 provides two separate channels of up to 8 GB DDR3-1066 ECC SDRAM, two XMC/PMC slots, 32 MB of NOR flash and up to 128 GB of NAND flash. The XCalibur4341 also supports five Gigabit Ethernet ports, two DVI-D graphics ports, audio, I²C, XMC I/O, PMC I/O, and RS-232/422/485 serial ports out the front panel and/or backplane connector.

The XCalibur4341 is a powerful, feature-rich solution for the next generation of compute-intensive embedded applications. Operating system support for Wind River VxWorks, Microsoft Windows, QNX Neutrino, and Linux is available.

X-ES

Extreme Engineering Solutions

...Always Fast

Extreme Engineering Solutions

9901 Silicon Prairie Parkway • Verona, WI 53593
 Phone: 608.833.1155 • Fax: 608.827.6171
 sales@xes-inc.com • <https://www.xes-inc.com>

Processor

- Intel® Core™ i7 processor operating at 2.53, 2.0, 1.06, or 1.33 GHz
- Dual-core with Hyper-Threading Technology
- Intel® QM57 chipset
- Dual-channel integrated memory controller
- Integrated graphics controller
- 4 MB of shared cache

Memory

- Up to 8 GB DDR3-1066 ECC SDRAM in two channels
- 32 MB of NOR flash
- Up to 128 GB of NAND flash
- 16 kB I²C EEPROM

VPX

- OpenVPX™ (VITA 65)
- Four x4 PCIe Gen2 ports to P1
- Two 1000BASE-BX Ethernet ports to P4
- Two 10/100/1000BASE-T Ethernet ports
- XMC and PMC I/O to P3, P4, P5, P6, mapping P3W1P4-P64s+X12d+X8d

Front Panel I/O (Optional)

- One HDMI video interface
- One 10/100/1000BASE-T Ethernet port
- One USB 2.0 port
- General-purpose LEDs

Back Panel

- Two RS-232/422/485 serial ports
- Two 10/100/1000BASE-T Ethernet ports
- Two 1000BASE-BX Ethernet ports
- Four SATA ports capable of 3 Gb/s
- PMC I/O
- Four USB 2.0 ports
- Audio line I/O port

XMC

- x8 PCIe Gen2 ports to J15 and J25
- One SATA port capable of 3 Gb/s to J26

PrPMC

- PCI-X (64/32-bit, 100/66 MHz)
- PCI (64/32-bit, 66/33 MHz)

Graphics

- Integrated high-performance 3D graphics controller
- Two DVI-D (one to front panel, one to P6)

Software Support

- Linux BSP
- Wind River VxWorks BSP
- QNX Neutrino BSP
- Greens Hills INTEGRITY BSP
- Microsoft Windows drivers

Environmental Requirements

Contact factory for appropriate board configuration based on environmental requirements.

- Supported ruggedization levels (see chart below): 1, 3, 5
- Conformal coating available as an ordering option

Power Requirements

- Power will vary based on configuration and usage. Please consult factory.

Ruggedization Level	Level 1	Level 3	Level 5
Cooling Method	Standard Air-Cooled	Rugged Air-Cooled	Conduction-Cooled
Operating Temperature	0 to +55°C ambient (300 LFM)	-40 to +70°C (600 LFM)	-40 to +85°C (board rail surface)
Storage Temperature	-40 to +85°C ambient	-55 to +105°C ambient	-55 to +105°C (maximum)
Vibration	0.002 g ² /Hz (maximum), 5 to 2000 Hz	0.04 g ² /Hz (maximum), 5 to 2000 Hz	0.1 g ² /Hz (maximum), 5 to 2000 Hz
Shock	20 g, 11 ms sawtooth	30 g, 11 ms sawtooth	40 g, 11 ms sawtooth
Humidity	0% to 95% non-condensing	0% to 95% non-condensing	0% to 95% non-condensing

