


XIt2045

PMC I/O Module (PIM) with Gigabit Ethernet and Serial

- ▶ PIM module
- ▶ Four 10/100/1000BASE-T Ethernet ports to RJ-45 connectors
- ▶ Two RS-232/422/485 serial ports to two DB-9 connectors (second port has CTS handshaking)
- ▶ Ethernet link/activity LEDs

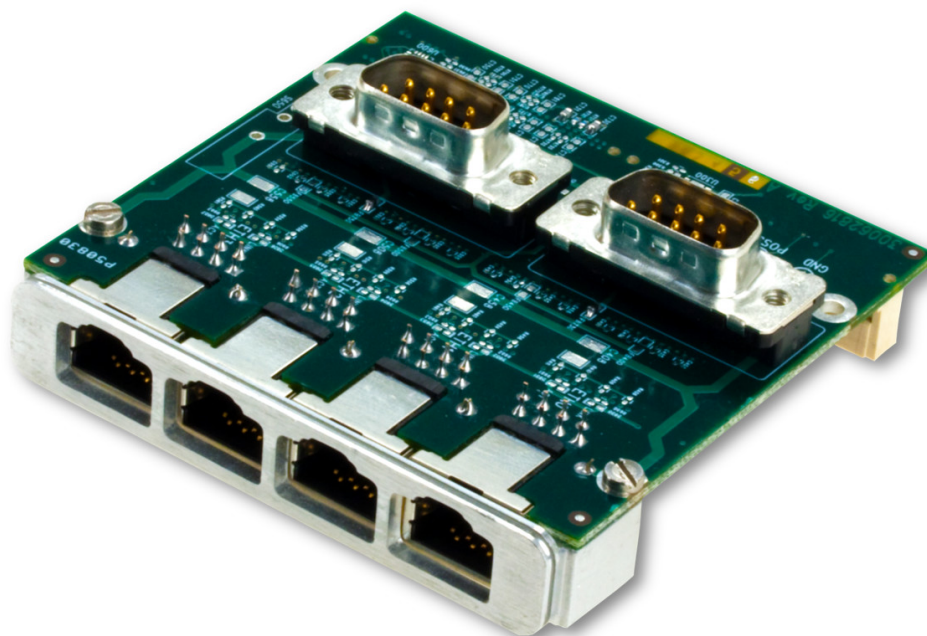

XIt2045

The XIt2045 is a PMC I/O Module (PIM), per the VITA 36 specification, which supports various X-ES XMC/PrPMC products. When installed on the appropriate carrier, such as the XTend3100 or XIt1003, the XIt2045 routes I/O signals from an associated PrPMC/XMC's rear panel P14 connector to allow connection of these signals to external equipment.

The XIt2045 breaks out 10/100/1000BASE-T Ethernet and RS-232 serial to RJ-45 and DB-9 connectors respectively.

X-ES

Extreme Engineering Solutions

...Always Fast

Extreme Engineering Solutions

9901 Silicon Prairie Parkway • Verona, WI 53593

Phone: 608.833.1155 • Fax: 608.827.6171

sales@xes-inc.com • <https://www.xes-inc.com>

Ethernet

- Four 10/100/1000BASE-T Ethernet ports to RJ-45 connectors
- Link and activity lights for all four ports

Serial

- Two RS-232/422/485 ports to DB-9 connectors. Second serial port includes CTS handshaking

Physical Characteristics

- PMC I/O Module (VITA 36)
- Dimensions: 74 mm x 69 mm

Environmental Requirements

Contact factory for appropriate board configuration based on environmental requirements.

- Supported ruggedization levels (see chart below): 1
- Conformal coating available as an ordering option

Ruggedization Level	Level 1	Level 3	Level 5
Cooling Method	Standard Air-Cooled	Rugged Air-Cooled	Conduction-Cooled
Operating Temperature	0 to +55°C ambient (300 LFM)	-40 to +70°C (600 LFM)	-40 to +85°C (board rail surface)
Storage Temperature	-40 to +85°C ambient	-55 to +105°C ambient	-55 to +105°C (maximum)
Vibration	0.002 g ² /Hz (maximum), 5 to 2000 Hz	0.04 g ² /Hz (maximum), 5 to 2000 Hz	0.1 g ² /Hz (maximum), 5 to 2000 Hz
Shock	20 g, 11 ms sawtooth	30 g, 11 ms sawtooth	40 g, 11 ms sawtooth
Humidity	0% to 95% non-condensing	0% to 95% non-condensing	0% to 95% non-condensing

