


XIt3115

XMC I/O Module (XIM) for XPort9102

- ▶ XIM module
- ▶ One XMC connector
- ▶ X12d routing to DB-25 connector

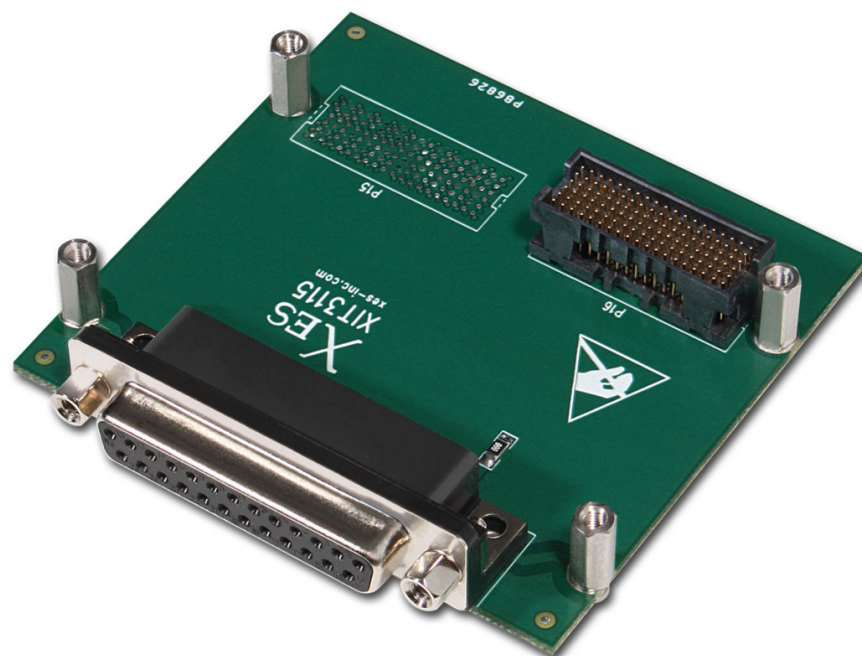

XIt3115

The XIt3115 is an XMC input/output module (XIM), which may be used to provide access to the I/O from the XPort9102 when used with either the XTend3100 or the XIt1074 and an appropriate chassis. The XIt3115 provides VITA 46.9 X12d I/O routing to a DB-25 connector.

X-ES

Extreme Engineering Solutions

...Always Fast

Extreme Engineering Solutions

9901 Silicon Prairie Parkway • Verona, WI 53593
 Phone: 608.833.1155 • Fax: 608.827.6171
 sales@xes-inc.com • <https://www.xes-inc.com>

XPort9102 Support

- When used with XPort9102 development system carrier, provides XMC card connectivity for rear I/O

Physical Characteristics

- XMC I/O module (XIM)
- Dimensions: 74 mm x 69 mm

Environmental Requirements

Contact factory for appropriate board configuration based on environmental requirements.

- Supported ruggedization levels (see chart below): 1
- Conformal coating available as an ordering option

Ruggedization Level	Level 1	Level 3	Level 5
Cooling Method	Standard Air-Cooled	Rugged Air-Cooled	Conduction-Cooled
Operating Temperature	0 to +55°C ambient (300 LFM)	-40 to +70°C (600 LFM)	-40 to +85°C (board rail surface)
Storage Temperature	-40 to +85°C ambient	-55 to +105°C ambient	-55 to +105°C (maximum)
Vibration	0.002 g ² /Hz (maximum), 5 to 2000 Hz	0.04 g ² /Hz (maximum), 5 to 2000 Hz	0.1 g ² /Hz (maximum), 5 to 2000 Hz
Shock	20 g, 11 ms sawtooth	30 g, 11 ms sawtooth	40 g, 11 ms sawtooth
Humidity	0% to 95% non-condensing	0% to 95% non-condensing	0% to 95% non-condensing

