


# XPort9200

**End of Life**

Conduction- or Air-Cooled 12-Channel High-Speed CAN Bus PMC or XMC

Please contact X-ES Sales

- ▶ 12 galvanically isolated CAN bus channels
- ▶ Compliant with CAN specifications 2.0A (11-Bit-ID) and 2.0B (29-Bit-ID)
- ▶ High-speed ISO 11898-2-compliant CAN bus channels
- ▶ Up to 1 Mbps per CAN bus channel
- ▶ On-card termination (optional)
- ▶ Conduction- or air-cooled
- ▶ Front panel, PMC P14, or XMC P16 I/O
- ▶ XMC PCIe or PMC PCI interface
- ▶ Conformal coating available
- ▶ NXP SJA1000-compatible CAN Controller (FPGA implementation)
- ▶ Linux SocketCAN support
- ▶ Wind River VxWorks and Microsoft Windows support

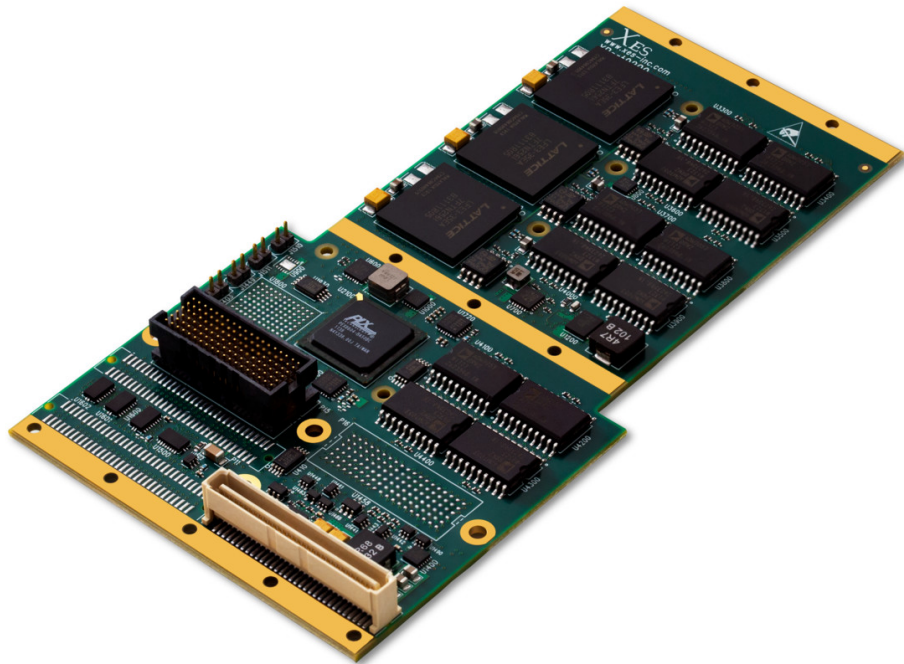

## XPort9200

The XPort9200 is a conduction- or air-cooled 12-channel CAN bus XMC or PMC module. Each high-speed CAN bus 2.0 A/B channel is galvanically isolated and supports up to 1 Mbps.

The XPort9200 supports a x1 PCIe XMC or 32-bit PCI PMC interface. All 12 CAN bus channels can be supported through the PMC P14, XMC P16, or front panel connector. Optional on-card termination also is available for each channel.

The XPort9200 utilizes an FPGA implementation of the NXP SJA1000 CAN bus controller and supports Linux SocketCAN. Wind River VxWorks and Microsoft Windows drivers also are available.

# X-ES

Extreme Engineering Solutions

*“Fast, Flexible, Customer-Focused  
Embedded Solutions”*

### Extreme Engineering Solutions

9901 Silicon Prairie Parkway • Verona, WI 53593  
Phone: 608.833.1155 • Fax: 608.827.6171  
sales@xes-inc.com • <https://www.xes-inc.com>

**P15 XMC Interface**

- VITA 42.3 x1 PCI Express port

**P11-P12 PMC Interface**

- 32-bit / 66 MHz PCI

**Rear I/O PMC/XMC Interface**

- 12 CAN bus channels via PMC P14 or XMC P16

**Software Support**

- Wind River VxWorks BSP
- Linux SocketCAN BSP
- Microsoft Windows drivers

**Physical Characteristics**

- PMC/XMC conduction- or air-cooled form factor
- Conduction cooling per VITA 20
- Dimensions: 143.75 mm x 74 mm

**CAN Bus Interface**

- Galvanically isolated
- ISO 11898-2-compliant
- Up to 1 Mbps per channel
- Compliant with CAN specifications 2.0A (11-Bit-ID) and 2.0B (29-Bit-ID)

**Configuration Options**

- PMC or XMC
- Front panel, P16 or P14 I/O
- Front panel I/O via optional breakout card accessory

**Environmental Requirements**

Contact factory for appropriate board configuration based on environmental requirements.

- Supported ruggedization levels (see chart below): 1, 3, 5
- Conformal coating available as an ordering option

**Power Requirements**

- Power will vary based on configuration. Please consult factory.

Ruggedization Level	Level 1	Level 3	Level 5
Cooling Method	Standard Air-Cooled	Rugged Air-Cooled	Conduction-Cooled
Operating Temperature	0 to +55°C ambient †	-40 to +70°C ambient †	-40 to +85°C (board rail surface)
Storage Temperature	-40 to +85°C ambient	-55 to +105°C ambient	-55 to +105°C (maximum)
Vibration	0.002 g <sup>2</sup> /Hz (maximum), 5 to 2000 Hz	0.04 g <sup>2</sup> /Hz (maximum), 5 to 2000 Hz	0.1 g <sup>2</sup> /Hz (maximum), 5 to 2000 Hz
Shock	20 g, 11 ms sawtooth	30 g, 11 ms sawtooth	40 g, 11 ms sawtooth
Humidity	Up to 95% non-condensing	Up to 95% non-condensing	Up to 95% non-condensing

† Contact factory for airflow rate details.

