

XPedite7475

End of Life

Intel® Core™ i7 Processor-Based 3U VPX Module for Use in the XPand4208 Rugged System **Please contact X-ES Sales**

- ▶ Supports 3rd generation Intel® Core™ i7 processors
- ▶ Quad- or dual-core processor with Intel® Hyper-Threading Technology
- ▶ 3U VPX (VITA 46) module
- ▶ Ruggedized Enhanced Design Implementation (REDI) per VITA 48
- ▶ Conduction cooling
- ▶ Up to 8 GB of DDR3 ECC SDRAM in two channels
- ▶ Up to 32 GB of NAND flash
- ▶ XMC interface with rear I/O
- ▶ Two Gen2 Fat Pipe P1 fabric interconnects
- ▶ Eight LVTTTL serial ports
- ▶ One HDMI/DVI-D port
- ▶ Intel® vPro™ technology for remote management
- ▶ Optional Trusted Platform Management (TPM)
- ▶ Wind River VxWorks BSP
- ▶ Linux BSP
- ▶ Microsoft Windows drivers
- ▶ Contact factory for availability of Green Hills INTEGRITY, QNX Neutrino, and LinuxWorks LynxOS BSPs



XPedite7475

The XPedite7475 is a high-performance, low-power, 3U VPX-REDI, single board computer based on the 3rd generation Intel® Core™ i7 processor and Intel® QM67 chipset. It was designed specifically for integration with the XPand4208 mil-flight-qualified 3U OpenVPX™ COTS rugged system. With two PCI Express Fat Pipe P1 interconnects and three Gigabit Ethernet ports, the XPedite7475 is ideal for the high-bandwidth and processing-intensive demands of today's military and avionics applications. Floating-Point-intensive applications such as radar, image processing, and signals intelligence will benefit from the performance boost provided by the Intel® Advanced Vector Extensions (Intel® AVX).

The XPedite7475 accommodates up to 8 GB of DDR3 ECC SDRAM in two channels to support memory-intensive applications. The XPedite7475 also hosts numerous I/O ports including Gigabit Ethernet, USB 2.0, SATA, graphics, and multiple serial ports through the backplane connectors.

The XPedite7475 can be used in either the system slot or peripheral slot of a VPX backplane. Wind River VxWorks and Linux Board Support Packages (BSPs) are available, as well as Microsoft Windows drivers.

The XPedite7475 provides Intel® vPro™ technology for remote management. Remote management is accessed via the P2 10/100/1000BASE-T Ethernet port.

X-ES

Extreme Engineering Solutions

...Always Fast

Extreme Engineering Solutions

9901 Silicon Prairie Parkway • Verona, WI 53593
 Phone: 608.833.1155 • Fax: 608.827.6171
 sales@xes-inc.com • <https://www.xes-inc.com>

Processor

- Quad- or dual-core Intel® Core™ i7
- Intel® Turbo Boost Technology
- Intel® Hyper-Threading Technology
- AVX instruction set extensions
- Integrated with Intel® QM67 chipset
- Dual-channel integrated memory controller
- Integrated high-performance 3D graphics controller

Quad-Core Processor Configurations

- Core™ i7-3612QE: 2.1 GHz, 6 MB cache

Dual-Core Processor Configurations

- Core™ i7-3555LE: 2.5 GHz, 4 MB cache
- Core™ i7-3517UE: 1.7 GHz, 4 MB cache

Memory

- Up to 8 GB of DDR3 ECC SDRAM in two channels
- 32 MB of NOR boot flash
- Up to 32 GB of NAND flash
- 16 kB EEPROM

Graphics

- Integrated high-performance 3D graphics controller
- One HDMI/DVI-D port

VPX (VITA 46) P0 I/O

- I²C port

VPX (VITA 46) P1 I/O

- x4 PCI Express Fat Pipe interface to P1.A
- x4 PCI Express Fat Pipe interface to P1.B
- Two 1000BASE-BX Gigabit Ethernet ports
- Four SATA ports capable of 3 Gb/s
- DVI graphics

VPX (VITA 46) P2 I/O

- One 10/100/1000BASE-T Gigabit Ethernet port with Intel® vPro™ support
- Four USB 2.0 ports
- Eight LVTTTL serial ports
- XMC P16 I/O
- Eight GPIO

XMC Site

- x8 PCI Express port
- One SATA port

Software Support

- Wind River VxWorks BSP
- Linux BSP
- Microsoft Windows drivers
- Contact factory for availability of Green Hills INTEGRITY, QNX Neutrino, and LynuxWorks LynxOS BSPs

Physical Characteristics

- 3U VPX-REDI conduction-cooled form factor
- Dimensions: 100 mm x 160 mm
- 0.8 in. pitch without solder-side cover
- 0.85 in. and 1.0 in. pitch with solder-side cover

Environmental Requirements

Contact factory for appropriate board configuration based on environmental requirements.


- Supported ruggedization levels (see chart below): 5
- Conformal coating available as an ordering option

Power Requirements

- Power will vary based on configuration and usage. Please consult factory.

Ruggedization Level	Level 1	Level 3	Level 5
Cooling Method	Standard Air-Cooled	Rugged Air-Cooled	Conduction-Cooled
Operating Temperature	0 to +55°C ambient †	-40 to +70°C ambient †	-40 to +85°C (board rail surface)
Storage Temperature	-40 to +85°C ambient	-55 to +105°C ambient	-55 to +105°C (maximum)
Vibration	0.002 g ² /Hz (maximum), 5 to 2000 Hz	0.04 g ² /Hz (maximum), 5 to 2000 Hz	0.1 g ² /Hz (maximum), 5 to 2000 Hz
Shock	20 g, 11 ms sawtooth	30 g, 11 ms sawtooth	40 g, 11 ms sawtooth
Humidity	0% to 95% non-condensing	0% to 95% non-condensing	0% to 95% non-condensing

† Contact factory for airflow rate details.

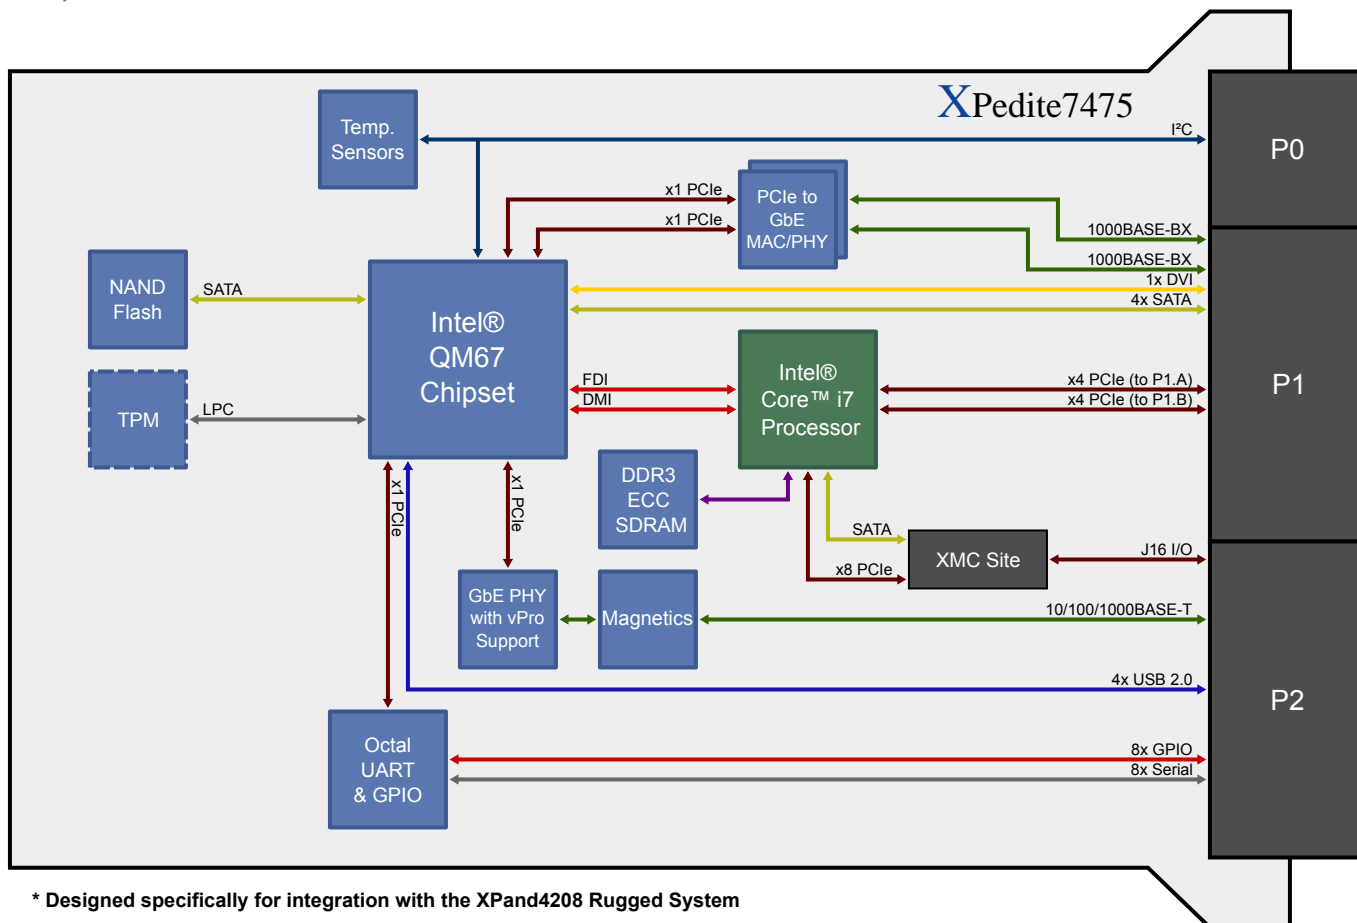

* Designed specifically for integration with the XPand4208 Rugged System